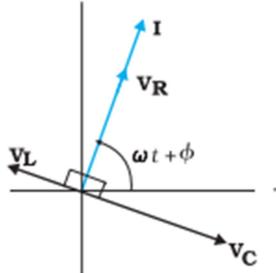
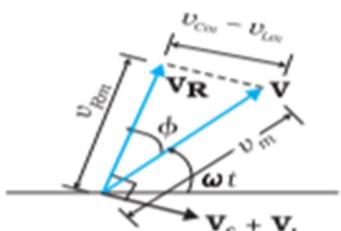


	$= E + \frac{(n-4)E}{nr} \times r$ $= \frac{(2n-4)E}{n}$	1/2					
		1/2	2				
18	<p>(a) <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td>Calculating the width of the slit</td><td>2</td></tr></table></p> <p>Condition for Minima $a \sin\theta = n\lambda$ For First Minima $n=1$ $a \sin 30^\circ = 600 \times 10^{-9} \text{ m}$ $a \times \frac{1}{2} = 600 \times 10^{-9} \text{ m}$ $a = 1200 \times 10^{-9} \text{ m}$ $= 1.2 \times 10^{-6} \text{ m}$</p> <p>OR</p> <p>(b) <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td>Finding the Intensity</td><td>2</td></tr></table></p> <p>Phase difference = $\frac{2\pi}{\lambda} \times \text{path difference}$</p> $\Delta\phi = \frac{2\pi}{\lambda} \Delta x$ $\therefore \Delta x = \frac{\lambda}{8} \text{ (given)}$ $\Delta\phi = \frac{2\pi}{\lambda} \times \frac{\lambda}{8}$ $\Delta\phi = \frac{\pi}{4}$ $I = I_0 + I_0 + 2\sqrt{I_0 I_0} \cos \frac{\pi}{4}$ $= 2I_0 + 2I_0 \times \frac{1}{\sqrt{2}}$ $I = 2I_0 \left(1 + \frac{1}{\sqrt{2}} \right)$ $= I_0 (2 + \sqrt{2})$ $I = 3.414 I_0$ <p>Alternatively</p>	Calculating the width of the slit	2	Finding the Intensity	2	1	
Calculating the width of the slit	2						
Finding the Intensity	2						
		1/2					
		1/2					
		1/2					
		1/2					
		1/2					
		1/2					


	<p>Phase difference = $\frac{2\pi}{\lambda} \times \text{path difference}$</p> $\Delta\phi = \frac{2\pi}{\lambda} \Delta x$ $\therefore \Delta x = \frac{\lambda}{8} \text{ (given)}$ $\Delta\phi = \frac{2\pi}{\lambda} \times \frac{\lambda}{8}$ $\Delta\phi = \frac{\pi}{4}$ $I = 4I_0 \cos^2\left(\frac{\phi}{2}\right)$ $I = 4I_0 \cos^2\left(\frac{\pi}{8}\right)$	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p>	<p>2</p>
19	<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;"> <p>Finding the focal length in water 2</p> </div> $\frac{1}{f} = \left(\frac{n_g}{n_w} - 1\right) \left(\frac{1}{R_1} - \frac{1}{R_2}\right)$ <p>For double convex lens $R_1=R$ and $R_2=-R$</p> $\frac{1}{f} = \left(\frac{1.5}{1.33} - 1\right) \left(\frac{2}{R}\right)$ $= \left(\frac{1.5 - 1.33}{1.33}\right) \left(\frac{2}{17}\right)$ $f = 66.5 \text{ cm}$	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p>	<p>2</p>
20	<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;"> <p>Calculation of change in the radius 2</p> </div> $E_n = \frac{-13.6}{n^2} \text{ eV}$ <p>For $E_n = -1.51 \text{ eV}$</p> $-1.51 = \frac{-13.6}{n^2}$ <p>$n=3$</p> <p>For $E_n = -3.40 \text{ eV}$</p> $-3.40 = \frac{-13.6}{n^2}$ <p>$n=2$</p>	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p>	


	$\therefore r = 0.53n^2 \text{ \AA}$ \therefore change in radius $\Delta r = 0.53[3^2 - 2^2]$ $= 0.53 \times 5$ $= 2.65 \text{ \AA}$	$\frac{1}{2}$	2								
21	<table border="1" style="width: 100%;"> <tr> <td>Finding the number of holes</td> <td style="text-align: right;">1</td> </tr> <tr> <td>One example</td> <td style="text-align: right;">1</td> </tr> </table> <p>Doping - 1 dopant atom for 5×10^7 Si atoms and number density of Si atoms = $5 \times 10^{28} \frac{\text{atoms}}{\text{m}^3}$ (given)</p> \therefore No. of holes created per $\text{m}^3 = \frac{5 \times 10^{28}}{5 \times 10^7} = 10^{21}$ <p>Number of holes created per cubic centimeter $= \frac{10^{21}}{10^6} = 10^{15}$</p> <p>Any one example of dopant - Aluminium / Indium / Gallium</p>	Finding the number of holes	1	One example	1	1	2				
Finding the number of holes	1										
One example	1										
SECTION - C											
22	<p>(a)</p> <table border="1" style="width: 100%;"> <tr> <td>Finding</td> <td></td> </tr> <tr> <td>(i) Equivalent emf of combination</td> <td style="text-align: right;">1</td> </tr> <tr> <td>(ii) Equivalent internal resistance of combination</td> <td style="text-align: right;">1</td> </tr> <tr> <td>(iii) Current drawn from combination</td> <td style="text-align: right;">1</td> </tr> </table> <p>(i) Because $E_{eq} = \frac{E_1 r_2 + E_2 r_1}{r_1 + r_2}$ $E_{eq} = \frac{3 \times 0.4 + 6 \times 0.2}{0.6} = 4 \text{ V}$</p> <p>(ii) $r_{eq} = \frac{r_1 r_2}{r_1 + r_2}$ $r_{eq} = \frac{0.2 \times 0.4}{0.2 + 0.4} = 0.133 \Omega$</p> <p>(iii) $I = \frac{E}{R + r_{eq}}$ $I = \frac{4}{4 + 0.13} = \frac{4}{4.13} \text{ A}$ $I = 0.9 \text{ A}$</p>	Finding		(i) Equivalent emf of combination	1	(ii) Equivalent internal resistance of combination	1	(iii) Current drawn from combination	1	$\frac{1}{2}$	
Finding											
(i) Equivalent emf of combination	1										
(ii) Equivalent internal resistance of combination	1										
(iii) Current drawn from combination	1										

	<p style="text-align: center;">OR</p> <p>(b)</p> <table border="1" style="margin-left: 20px;"> <tr> <td>(i) Finding the relation</td> <td></td> </tr> <tr> <td> (i) between R' and R</td> <td style="text-align: right;">1</td> </tr> <tr> <td> (ii) between V_d' and V_d</td> <td style="text-align: right;">1</td> </tr> <tr> <td>(ii) To identify whether all free electrons are moving in the same direction.</td> <td style="text-align: right;">1</td> </tr> </table> <p>(i) $l' = 2l$ $Al = A'l' = \text{volume of the wire}$ $Al = A'(2l)$ $\frac{A}{2} = A'$ $R = \frac{\rho l}{A}$ $R' = \frac{\rho l'}{A'}$ $R' = \frac{\rho(2l)}{A/2}$ $\frac{R'}{R} = 4$</p> <p>Alternatively $R' = n^2 R$ $n = 2$ $R' = 4R$</p> <p>(ii) $v_d = \frac{eE}{m} \tau$ $v_d = \frac{eV}{ml} \tau$ $v_d' = \frac{eV}{ml'} \tau$ $\frac{v_d'}{v_d} = \frac{l}{l'} = \frac{1}{2}$</p> <p>(ii) No</p>	(i) Finding the relation		(i) between R' and R	1	(ii) between V_d' and V_d	1	(ii) To identify whether all free electrons are moving in the same direction.	1	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>1</p>	3
(i) Finding the relation											
(i) between R' and R	1										
(ii) between V_d' and V_d	1										
(ii) To identify whether all free electrons are moving in the same direction.	1										
23	<table border="1" style="margin-left: 20px;"> <tr> <td>Finding</td> <td></td> </tr> <tr> <td>a) The magnetic field \vec{B}</td> <td style="text-align: right;">1</td> </tr> <tr> <td>b) The magnetic force \vec{F}_m</td> <td style="text-align: right;">1</td> </tr> <tr> <td>c) The electric field \vec{E}</td> <td style="text-align: right;">1</td> </tr> </table>	Finding		a) The magnetic field \vec{B}	1	b) The magnetic force \vec{F}_m	1	c) The electric field \vec{E}	1		
Finding											
a) The magnetic field \vec{B}	1										
b) The magnetic force \vec{F}_m	1										
c) The electric field \vec{E}	1										

	<p>a) $\vec{B} = \frac{\mu_0 I}{2\pi d} (-\hat{K})$</p> <p>b) $\vec{F}_B = q(\vec{v} \times \vec{B}) = \frac{qv\mu_0 I}{2\pi d} (-\hat{j})$</p> <p>c) $q\vec{F}_e = -\vec{F}_B$ (For undeviation of charge particle)</p> <p>$\therefore \vec{F}_e = \frac{qv\mu_0 I}{2\pi d} (\hat{j})$</p> <p>$\vec{F}_e = q\vec{E}$</p> <p>$\therefore \vec{E} = \frac{\mu_0 v I}{2\pi d} \hat{j}$</p>	1							
24	<table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="padding: 5px;">Drawing phasor diagram</td> <td style="text-align: right; padding: 5px;">1</td> </tr> <tr> <td style="padding: 5px;">Obtaining the expression for Impedance of the circuit</td> <td style="text-align: right; padding: 5px;">1 ½</td> </tr> <tr> <td style="padding: 5px;">Phase difference</td> <td style="text-align: right; padding: 5px;">½</td> </tr> </tbody> </table> <p>a)</p>  <p>b)</p>  <p>$V_{Rm} = i_m R, V_{Cm} = i_m X_c, V_{Lm} = i_m X_L$</p> <p>From Phasor diagram</p> <p>$V_m^2 = V_{Rm}^2 + (V_{Cm} - V_{Lm})^2$</p> <p>$V_m^2 = (i_m R)^2 + (i_m X_c - i_m X_L)^2$</p>	Drawing phasor diagram	1	Obtaining the expression for Impedance of the circuit	1 ½	Phase difference	½	½ + ½	
Drawing phasor diagram	1								
Obtaining the expression for Impedance of the circuit	1 ½								
Phase difference	½								


	$= (i_m)^2 [R^2 + (X_c - X_L)^2]$ <p>Or $i_m = \frac{V_m}{\sqrt{R^2 + (X_c - X_L)^2}}$</p> $\therefore i_m = \frac{V_m}{Z}$ $\therefore Z = \sqrt{R^2 + (X_c - X_L)^2}$ <p>From phasor diagram</p> $\tan \theta = \frac{V_{Cm} - V_{Lm}}{V_{Rm}}$ $= \frac{X_c - X_L}{R}$ $\therefore \theta = \tan^{-1} \left(\frac{X_c - X_L}{R} \right)$	1/2					
		1/2					
		1/2	3				
25	<table border="1" style="width: 100%;"> <tbody> <tr> <td>a) Showing that ($I_c + I_d$) has the same value.</td> <td style="text-align: right;">2</td> </tr> <tr> <td>b) Explanation of Kirchhoff's first rule at each plate of capacitor.</td> <td style="text-align: right;">1</td> </tr> </tbody> </table> <p>a) \therefore Total current $I = I_c + I_d$ outside the capacitor $I_d = 0$ $\therefore I = I_c$ Inside the capacitor $I_c = 0$</p> $\therefore I = I_d = \epsilon_0 \frac{d\phi_E}{dt}$ $= \epsilon_0 \frac{d}{dt} [EA]$ $= \epsilon_0 \frac{d}{dt} \left[\frac{\sigma}{\epsilon_0} A \right]$ $= \frac{\epsilon_0}{\epsilon_0} A \frac{d}{dt} \left[\frac{Q}{A} \right]$ $I = \frac{dQ}{dt} = I_c$ <p>Alternatively \therefore Total current $I = I_c + I_d$ outside the capacitor $I_d = 0$ $\therefore I = I_c$ Inside the capacitor $I_c = 0$</p>	a) Showing that ($I_c + I_d$) has the same value.	2	b) Explanation of Kirchhoff's first rule at each plate of capacitor.	1	1/2	
a) Showing that ($I_c + I_d$) has the same value.	2						
b) Explanation of Kirchhoff's first rule at each plate of capacitor.	1						
		1/2					
		1/2					
		1/2					
		1/2					

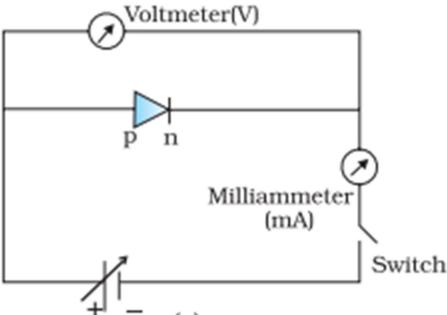	$I = I_d = \epsilon_0 \frac{d\phi_E}{dt}$ $= \epsilon_0 \frac{d}{dt} \left[\frac{Q}{\epsilon_0} \right]$ $I = \frac{dQ}{dt} = I_c$ <p>hence $I_c + I_d$ has the same value at all points of the circuit.</p> <p>b) Yes Current entering the capacitor is (I_c) and between the plates capacitor is (I_d) $I_c = I_d$ which validates Kirchoff's junction rule.</p>	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>1</p>	<p>3</p>
26	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>a) Mentioning three features 1 $\frac{1}{2}$</p> <p>b) Calculating the value of Planck's constant 1 $\frac{1}{2}$</p> </div> <p>a) Three features</p> <p>i) The existence of threshold frequency (ν_0)</p> <p>ii) Maximum Kinetic energy of photoelectrons is independent of intensity of incident radiation.</p> <p>iii) Instantaneous nature of photoelectric effect.</p> <p>b) slope = $\frac{h}{e}$</p> <p>$\therefore h = e \times \text{slope}$ $= 1.6 \times 10^{-19} \times 4.12 \times 10^{-15}$ $= 6.6 \times 10^{-34} \text{ Js}$</p>	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>1</p> <p>$\frac{1}{2}$</p>	<p>3</p>
27	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>a) Circuit Arrangement for studying V-I characteristics. 1</p> <p>b) Showing the shape of characteristic curves. 1</p> <p>c) Two informations from the characteristics $\frac{1}{2} + \frac{1}{2}$</p> </div> <p>a)</p> <div style="text-align: center;">  <p>Circuit diagram for forward characteristics</p> </div>	<p>$\frac{1}{2}$</p>	

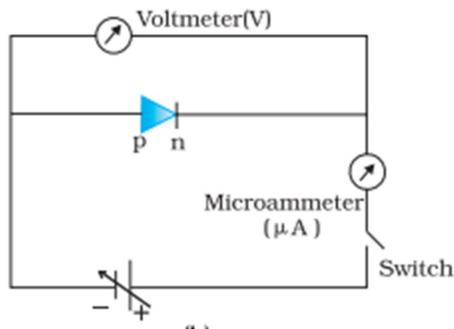

Circuit diagram for Reverse characteristics

b)

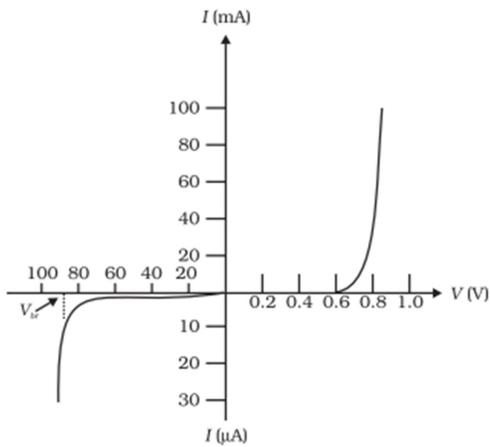

Note : Please do not deduct marks for not writing values.

c) Any two informations

Knee voltage / reverse saturation current / Breakdown voltage / very low resistance in forward biasing / very high resistance in Reverse biasing.

1/2

1

1/2 + 1/2

3

28

- | | | |
|----|----------------------------|-----|
| a) | Defining Mass Defect | 1/2 |
| | Defining Binding Energy | 1/2 |
| | Describing Fission Process | 1/2 |
| b) | Calculation of Mass Defect | 1 |
| | Calculation of Energy | 1/2 |

a) Difference in the mass of the nucleus and its constituents is defined as mass defect.

Binding Energy is the energy required to separate the nucleons from the

1/2

1/2

ii) 1) Distance between adjacent bright fringe = fringe width

$$\beta = \frac{\lambda D}{d}$$

$$= \frac{600 \times 10^{-9} \times 1.2}{0.1 \times 10^{-3}} = 7.2 \text{ mm}$$

2) $\theta = \frac{\lambda}{d}$

$$= \frac{600 \times 10^{-9}}{0.1 \times 10^{-3}} = 6 \times 10^{-3} \text{ rad} = 0.34^\circ$$


Give full marks if the student writes the answer in radians only.

OR


b)

i) Definition of wave front.	1
Drawing the incident and refracted wave front	½ + ½
ii) Drawing the ray diagram	1
Obtaining the position of final image	2

i) A wavefront is a locus of all the points which oscillate in phase.

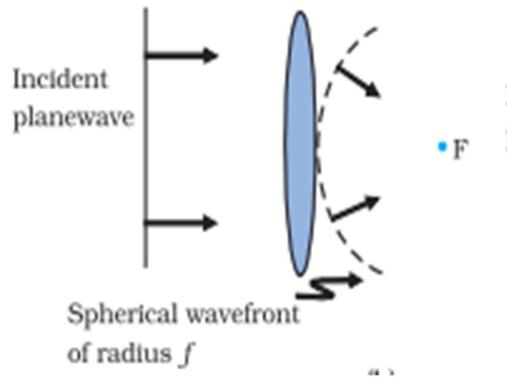

ii)

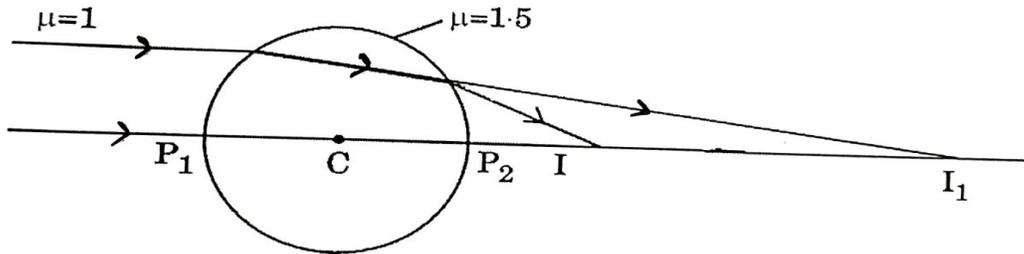


From Ist surface, Refraction is from rarer to denser medium and object is at ∞
 $n_1 = 1, n_2 = 1.5, R = 15 \text{ cm}, u = \infty$

	$\frac{n_2}{v} - \frac{n_1}{u} = \frac{n_2 - n_1}{R}$ $\frac{1.5}{v} - \frac{1}{\infty} = \frac{1.5 - 1}{15}$ $v = 45 \text{ cm}$ <p>From 2nd surface, Refraction is from denser to rarer medium and object is at 15 cm</p> $n_1 = 1, \quad n_2 = 1.5, \quad R = -15 \text{ cm}, \quad u = 15 \text{ cm}$ $\frac{n_1}{v} - \frac{n_2}{u} = \frac{n_1 - n_2}{R}$ $\frac{1}{v} - \frac{1.5}{15} = \frac{1 - 1.5}{-15}$ $v = 7.5 \text{ cm}$	$\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$	5								
32	<p>a)</p> <table border="1" style="margin-left: 20px;"> <tbody> <tr> <td>i) Calculating the change in electrostatic energy of the system</td> <td style="text-align: right;">2</td> </tr> <tr> <td>ii) (1) Finding the capacitance.</td> <td style="text-align: right;">1</td> </tr> <tr> <td> (2) Finding the potential difference.</td> <td style="text-align: right;">1</td> </tr> <tr> <td> (3) Answering and Reason</td> <td style="text-align: right;">$\frac{1}{2} + \frac{1}{2}$</td> </tr> </tbody> </table> <p>(i) $\vec{E} = \frac{3 \times 10^5}{r^2} \hat{r}$ (Given) $dV = -\vec{E} \cdot d\vec{r}$</p> <p>$V = 3 \times 10^5 / r$</p> <p>Electrostatic energy of the system in the absence of the field</p> $U_i = \frac{Kq_1q_2}{r_{12}}$ <p>Electrostatic energy in the presence of the field</p> $U_f = \frac{Kq_1q_2}{r_{12}} + q_1V(\vec{r}_1) + q_2V(\vec{r}_2)$ $\Delta U = U_f - U_i = q_1V(\vec{r}_1) + q_2V(\vec{r}_2)$ $\Delta U = \frac{5 \times 10^{-6} \times 3 \times 10^5}{3 \times 10^{-2}} - \frac{1 \times 10^{-6} \times 3 \times 10^5}{3 \times 10^{-2}}$ $= 40 \text{ J}$ <p>ii) 1) $C = \frac{Q}{V} = \frac{80}{16} = 5 \mu\text{F}$</p> <p>2) $C' = KC$ $= 3 \times 5 \mu\text{F} = 15 \mu\text{F}$ $V' = \frac{Q}{C'} = \frac{80 \mu\text{C}}{15 \mu\text{F}} = 5.33 \text{ V}$</p> <p>3) No,</p>	i) Calculating the change in electrostatic energy of the system	2	ii) (1) Finding the capacitance.	1	(2) Finding the potential difference.	1	(3) Answering and Reason	$\frac{1}{2} + \frac{1}{2}$	$\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$	
i) Calculating the change in electrostatic energy of the system	2										
ii) (1) Finding the capacitance.	1										
(2) Finding the potential difference.	1										
(3) Answering and Reason	$\frac{1}{2} + \frac{1}{2}$										

	<p>The capacitance of the system depends on its geometry. OR</p> <p>b) <table border="1" style="display: inline-table; vertical-align: top;"> <tr> <td>i) Comparing the magnitude of the Electric fields</td> <td style="text-align: right;">2</td> </tr> <tr> <td>ii) Calculating the work done on the charge</td> <td style="text-align: right;">3</td> </tr> </table></p> <p>Total charge for A = Total charge for B = Total charge for C = +4q As, $E = \frac{kQ}{r^2}$ Since $Q = 4q$ and $r = 3R$ $E = \frac{k(4q)}{9R^2} = \frac{4kq}{9R^2}$ $\therefore E_A = E_B = E_C$ ii) $V_C = \left[\frac{k \times 6 \times 10^{-6}}{5 \times 10^{-2}} - \frac{k \times 6 \times 10^{-6}}{5 \times 10^{-2}} \right]$ $= 0$ $V_A = \left[\frac{k \times 6 \times 10^{-6}}{15 \times 10^{-2}} - \frac{k \times 6 \times 10^{-6}}{5 \times 10^{-2}} \right]$ $= \frac{k \times 6 \times 10^{-6}}{10^{-2}} \left[\frac{1-3}{15} \right]$ $= -\frac{9 \times 10^9 \times 6 \times 10^{-6} \times 2}{15 \times 10^{-2}}$ $= -7.2 \times 10^5 \text{ V}$ $W = q[V_A - V_C]$ $= 5 \times 10^{-6} [-7.2 \times 10^5 - 0]$ $W = -3.6 \text{ J}$</p>	i) Comparing the magnitude of the Electric fields	2	ii) Calculating the work done on the charge	3	<p>$\frac{1}{2}$</p> <p>1</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>1</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p>	<p>5</p>		
i) Comparing the magnitude of the Electric fields	2								
ii) Calculating the work done on the charge	3								
<p>33</p>	<p>a) <table border="1" style="display: inline-table; vertical-align: top;"> <tr> <td>i) Finding the direction of magnetic field near points P,Q and R</td> <td style="text-align: right;">$\frac{1}{2} + \frac{1}{2} + \frac{1}{2}$</td> </tr> <tr> <td>Conclusion about the relative magnitude of magnetic field.</td> <td style="text-align: right;">$\frac{1}{2} + \frac{1}{2} + \frac{1}{2}$</td> </tr> <tr> <td>ii) Showing the given expression of magnetic moment.</td> <td style="text-align: right;">2</td> </tr> </table></p> <p>i) <u>Near point P</u> Magnetic field is acting into the plane of the paper as Force is acting upwards. <u>Near point Q</u> Magnetic field is into the plane of paper as force is acting upwards. <u>Near point R</u> Magnetic field is acting out of the plane of the paper as \vec{F} is acting downwards. <u>Relative Magnitude of the Magnetic field.</u> As $B \propto \frac{1}{r}$</p>	i) Finding the direction of magnetic field near points P,Q and R	$\frac{1}{2} + \frac{1}{2} + \frac{1}{2}$	Conclusion about the relative magnitude of magnetic field.	$\frac{1}{2} + \frac{1}{2} + \frac{1}{2}$	ii) Showing the given expression of magnetic moment.	2	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p>	
i) Finding the direction of magnetic field near points P,Q and R	$\frac{1}{2} + \frac{1}{2} + \frac{1}{2}$								
Conclusion about the relative magnitude of magnetic field.	$\frac{1}{2} + \frac{1}{2} + \frac{1}{2}$								
ii) Showing the given expression of magnetic moment.	2								

Alternatively

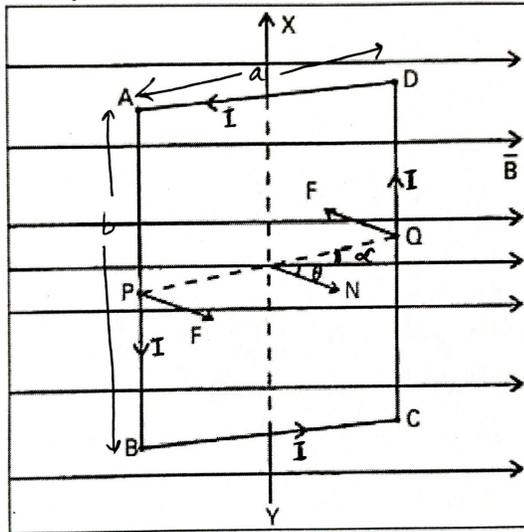

If the plane of the current carrying coil makes an angle α with the magnetic field

$$\vec{F}_{DA} = -\vec{F}_{BC} \text{ (cancel each other) .}$$

Force on the arm DC is into the plane of the paper

$$|F_{DC}| = IbB .$$

Force on the arm AB is out of the plane of the paper.

$$|F_{AB}| = IbB$$

Both of them form a couple and Torque acting on the coil is

$\tau = \text{either force} \times \text{perpendicular distance between the two forces.}$

$$\tau = IbB \times a \cos \alpha$$

$$= IabB \cos \alpha$$

$$\tau = IAB \cos \alpha$$

Let \hat{n} = outward drawn normal to the plane of the coil.

$$\theta + \alpha = 90^\circ$$

$$\alpha = 90^\circ - \theta$$

$$\tau = IAB \cos(90 - \theta)$$

$$= IAB \sin \theta$$

$$\vec{\tau} = I\vec{A} \times \vec{B}$$

$$\text{ii) 1) } r = \frac{mv}{qB} = \frac{\sqrt{2mK}}{qB}$$

$$r \propto \sqrt{K}$$

$$\frac{r'}{r} = \frac{\sqrt{K/2}}{\sqrt{K}} = \frac{1}{\sqrt{2}}$$

$$r' = \frac{r}{\sqrt{2}}$$

1/2

1/2

1/2

1/2

1/2

1/2

1/2

1/2

	<p>2) $T = \frac{2\pi m}{qB}$</p> <p>Time period does not depend on Kinetic Energy</p> <p>\therefore Time period will not change.</p>	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p>	<p>5</p>
--	---------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------	----------