


<p>18.</p>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> Minimum distance of bright fringe from central maximum 2 </div> $n\lambda_1 = (n+1)\lambda_2$ $n \times 600 = (n+1) \times 400$ $\therefore n = 2$ $\therefore x = \frac{2\lambda_1 D}{d}$ $= \frac{2 \times 600 \times 10^{-9} \times 1.5}{1.5 \times 10^{-3}}$ $x = 1.2 \times 10^{-3} \text{ m}$	<p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">$\frac{1}{2}$</p>	<p style="text-align: center;">2</p>
<p>19.</p>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> Finding focal length of plano convex lens 2 </div> $\frac{1}{f} = \left(\frac{n_2}{n_1} - 1 \right) \left[\frac{1}{R_1} - \frac{1}{R_2} \right]$ <p>For plano convex lens $R_1 = R$ and $R_2 = \infty$</p> $\frac{1}{f} = \left(\frac{n_2}{n_1} - 1 \right) \frac{1}{R}$ $= \left(\frac{1.5}{1.25} - 1 \right) \times \frac{1}{10}$ $\frac{1}{f} = \frac{1}{50}$ $\therefore f = 50 \text{ cm}$	<p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">$\frac{1}{2}$</p>	<p style="text-align: center;">2</p>
<p>20.</p>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> Finding the ratio of minimum to maximum wavelength of radiations 2 </div> $\frac{1}{\lambda} = R \left[\frac{1}{n_f^2} - \frac{1}{n_i^2} \right]$ $\frac{1}{\lambda_{\max}} = R \left[\frac{1}{1^2} - \frac{1}{2^2} \right]$ $\lambda_{\max} = \frac{4}{3R}$ $\frac{1}{\lambda_{\min}} = R \left[\frac{1}{1^2} - \frac{1}{\infty} \right]$ $\lambda_{\min} = \frac{1}{R}$	<p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">$\frac{1}{2}$</p>	

	$\frac{\lambda_{\min}}{\lambda_{\max}} = \frac{3}{4}$ <p>Alternatively</p> <p>for λ_{\min}, $n_1=1$ $n_2 = \infty$</p> $E_2 - E_1 = \frac{hc}{\lambda_{\min}}$ $0 - (-13.6) = \frac{hc}{\lambda_{\min}}$ $\lambda_{\min} = \frac{hc}{13.6}$ $\lambda_{\max} \quad n_1=1 \quad n_2=2$ $\lambda_{\max} = \frac{hc}{-3.4 - (-13.6)}$ $\lambda_{\max} = \frac{hc}{10.2}$ $\frac{\lambda_{\min}}{\lambda_{\max}} = \frac{3}{4}$	<p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p>	<p>2</p>										
<p>21.</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="padding: 5px;"> <p>(a)</p> </td> </tr> <tr> <td style="padding: 5px;">(i) Comparison of brightness of bulbs P and Q with bulb S</td> <td style="text-align: right; padding: 5px;">1/2</td> </tr> <tr> <td style="padding: 5px;">Justification</td> <td style="text-align: right; padding: 5px;">1/2</td> </tr> <tr> <td colspan="2" style="padding: 5px;">(ii) Comparison of brightness of bulb S with Q</td> </tr> <tr> <td style="padding: 5px;">Justification</td> <td style="text-align: right; padding: 5px;">1/2</td> </tr> </table> <p style="margin-left: 40px;">(i) Brightness of the bulb 'S' will be more than bulbs 'P' and 'Q'</p> <p style="margin-left: 80px;">The current flowing through the bulb 'S' is twice of the current in bulbs 'P' and 'Q'.</p> <p style="margin-left: 40px;">(ii) Brightness of the bulb 'S' and 'Q' will be same</p> <p style="margin-left: 80px;">The current flowing through both bulbs is same.</p> <p>Alternatively-</p> <p style="margin-left: 40px;">(i) Brightness of the bulb 'S' will be more than bulbs 'P' and 'Q'</p> <p style="margin-left: 80px;">The potential difference across 'S' is twice than the potential difference across bulbs 'P' and 'Q'</p> <p style="margin-left: 40px;">(ii) Brightness of both bulbs 'S' and 'Q' is same.</p> <p style="margin-left: 80px;">The potential difference across 'S' and 'Q' will be same.</p>	<p>(a)</p>		(i) Comparison of brightness of bulbs P and Q with bulb S	1/2	Justification	1/2	(ii) Comparison of brightness of bulb S with Q		Justification	1/2	<p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p>	
<p>(a)</p>													
(i) Comparison of brightness of bulbs P and Q with bulb S	1/2												
Justification	1/2												
(ii) Comparison of brightness of bulb S with Q													
Justification	1/2												

OR

(b) Finding the current through the bulb 'B' 2

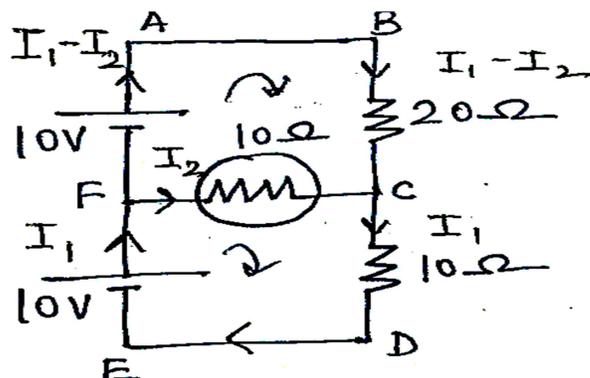

By applying Kirchoff's loop rule to closed loops ABCFA and FCDEF

$$2I_1 - 3I_2 = 1 \text{ ----(1)}$$

$$I_1 + I_2 = 1 \text{ ----(2)}$$

On solving,

Current through the bulb,

$$I_2 = \frac{1}{5} \text{ A}$$

1/2

1/2

1/2

1/2

2

SECTION - C

22.

Explanation of

(a) Photoelectric emission 1

(b) Dependency of maximum kinetic energy on frequency only 1

(c) Explanation of slope of cut off voltage versus frequency graph 1

(a) Einstein Photo electric equation

$$h\nu = h\nu_0 + K_{\max}$$

$$K_{\max} = h(\nu - \nu_0)$$

For $\nu < \nu_0$, K_{\max} will be negative

Hence, Photoelectric emission is not possible.

(b) According to Einstein Photoelectric equation

$$K_{\max} = h(\nu - \nu_0)$$

Hence $K_{\max} \propto \nu$


It shows K_{\max} depends upon frequency only and not depends upon

1/2



1/2


1/2

1/2

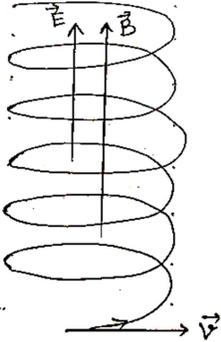	<p>intensity.</p> <p>(c) $eV_0 = hv - hv_0$</p> $V_0 = \frac{h}{e}v - \frac{h}{e}v_0$ <p>This equation represents the equation of straight line ($y = mx + c$) with the slope $\frac{h}{e}$.</p>	$\frac{1}{2}$																				
	$\frac{1}{2}$	3																				
23.	<table border="1"> <tr> <td>(a)</td> <td></td> <td></td> </tr> <tr> <td>• Explanation of a path followed by the particle</td> <td></td> <td>1</td> </tr> <tr> <td>• Shape of path</td> <td></td> <td>1</td> </tr> <tr> <td>(b) Effect on magnetic field when</td> <td></td> <td></td> </tr> <tr> <td>(i) Radius of turns of solenoid is increased</td> <td></td> <td>$\frac{1}{2}$</td> </tr> <tr> <td>(ii) Length and number of turns are doubled</td> <td></td> <td>$\frac{1}{2}$</td> </tr> </table> <p>(a) Due to magnetic field particle will follow circular path and due to electric field, particle will accelerate along the electric field. As a result particle will follow a helical path with constant radius but increasing pitch.</p>  <p>(b) (i) $B = \frac{\mu_0 NI}{l}$ No change</p> <p>(ii) $\frac{N}{l} = \frac{2N}{2l}$ No Change</p>	(a)			• Explanation of a path followed by the particle		1	• Shape of path		1	(b) Effect on magnetic field when			(i) Radius of turns of solenoid is increased		$\frac{1}{2}$	(ii) Length and number of turns are doubled		$\frac{1}{2}$	1	1	
(a)																						
• Explanation of a path followed by the particle		1																				
• Shape of path		1																				
(b) Effect on magnetic field when																						
(i) Radius of turns of solenoid is increased		$\frac{1}{2}$																				
(ii) Length and number of turns are doubled		$\frac{1}{2}$																				
	$\frac{1}{2}$																					
	$\frac{1}{2}$	3																				
24.	<table border="1"> <tr> <td>(a) Difference between magnetic flux through an area and magnetic field at a point</td> <td></td> <td>1</td> </tr> <tr> <td>(b) Explanation of induced current and direction.</td> <td></td> <td>2</td> </tr> </table> <p>(a) Magnetic flux is equal to total number of magnetic field lines</p>	(a) Difference between magnetic flux through an area and magnetic field at a point		1	(b) Explanation of induced current and direction.		2	$\frac{1}{2}$														
(a) Difference between magnetic flux through an area and magnetic field at a point		1																				
(b) Explanation of induced current and direction.		2																				

	<p>passing normal to given area. Magnetic field at a point in the space around the magnet or moving charge where magnetic force can be experienced. (b) When south pole of the bar magnet moves closer to coil, the magnetic flux through the coil increases. Hence according to Faraday's law induced emf/current generate in the coil. According to Lenz's law near end of the coil become south pole and as a consequence, current flows in the coil is clockwise direction.</p>	<p>1/2 1 1</p>	<p>3</p>												
25.	<table border="1" style="width: 100%;"> <tr> <td>(a) Three characteristics of electro- magnetic wave</td> <td style="text-align: right;">1 1/2</td> </tr> <tr> <td>(b) Explanation of displacement current,</td> <td></td> </tr> <tr> <td> • how</td> <td style="text-align: right;">1</td> </tr> <tr> <td> • Where it exists</td> <td style="text-align: right;">1/2</td> </tr> </table> <p>(a) (Any three)</p> <ul style="list-style-type: none"> • Electromagnetic wave carries energy. • Electromagnetic wave carries momentum. • Electromagnetic wave moves with velocity of light in vacuum. • In electromagnetic wave, electric field vector, magnetic field vector and direction of propagation, all are mutually perpendicular. • Electromagnetic waves are transverse in nature. • Electromagnetic waves do not require a physical medium to propagate and can travel through a vacuum. • Electromagnetic waves consist of oscillating electric and magnetic fields. <p>(b)</p> <ul style="list-style-type: none"> • During charging of capacitor, time varying electric field / electric flux between the plates of capacitor induces the displacement current. • Displacement current exists between the plates of a capacitor. 	(a) Three characteristics of electro- magnetic wave	1 1/2	(b) Explanation of displacement current,		• how	1	• Where it exists	1/2	<p>1/2 1/2 1/2 1 1/2</p>	<p>3</p>				
(a) Three characteristics of electro- magnetic wave	1 1/2														
(b) Explanation of displacement current,															
• how	1														
• Where it exists	1/2														
26.	<table border="1" style="width: 100%;"> <tr> <td>(a)</td> <td></td> </tr> <tr> <td> • Definition of wavefront</td> <td style="text-align: right;">1/2</td> </tr> <tr> <td> • Shape of refracted wavefront</td> <td style="text-align: right;">1/2</td> </tr> <tr> <td>(b)</td> <td></td> </tr> <tr> <td> • Diagram for refraction of wave</td> <td style="text-align: right;">1/2</td> </tr> <tr> <td> • Verification of Snell's law</td> <td style="text-align: right;">1 1/2</td> </tr> </table> <p>(a) Wave front- It is a continuous locus at every point on it, all the particles of medium are vibrating in same phase.</p>	(a)		• Definition of wavefront	1/2	• Shape of refracted wavefront	1/2	(b)		• Diagram for refraction of wave	1/2	• Verification of Snell's law	1 1/2	<p>1/2</p>	
(a)															
• Definition of wavefront	1/2														
• Shape of refracted wavefront	1/2														
(b)															
• Diagram for refraction of wave	1/2														
• Verification of Snell's law	1 1/2														

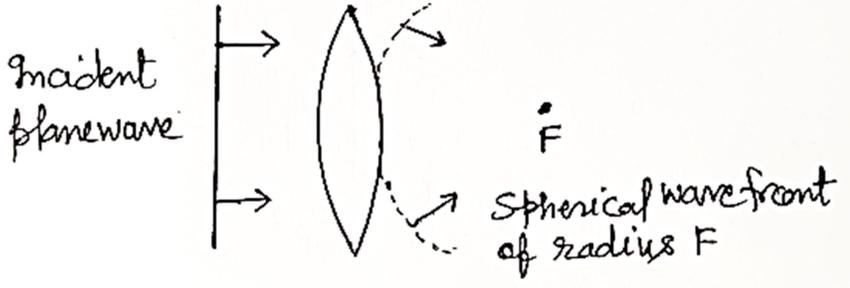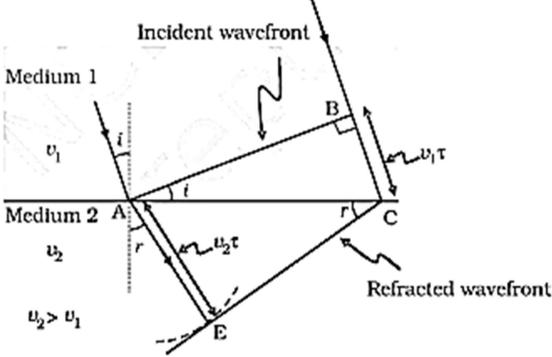	 <p>(b)</p>  <p>Considering triangle ABC and AEC</p> $\sin i = \frac{BC}{AC} = \frac{v_1 \tau}{AC} \text{ -----(1)}$ $\sin r = \frac{AE}{AC} = \frac{v_2 \tau}{AC} \text{ -----(2)}$ $\frac{\sin i}{\sin r} = \frac{v_1}{v_2} = \frac{n_2}{n_1}$ $n_1 \sin i = n_2 \sin r$	<p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p> <p>3</p>					
<p>27.</p>	<table border="1" data-bbox="284 1486 1187 1671"> <tr> <td>(a) Majority and minority charge carriers in p-type and n-type semiconductor</td> <td>2</td> </tr> <tr> <td>(b) Brief explanation for formation of diffusion current and drift current</td> <td>1</td> </tr> </table> <p>(a) In p-type semiconductor Majority charge carriers - holes Minority charge carriers - electrons</p>	(a) Majority and minority charge carriers in p-type and n-type semiconductor	2	(b) Brief explanation for formation of diffusion current and drift current	1	<p>1/2</p> <p>1/2</p>	
(a) Majority and minority charge carriers in p-type and n-type semiconductor	2						
(b) Brief explanation for formation of diffusion current and drift current	1						

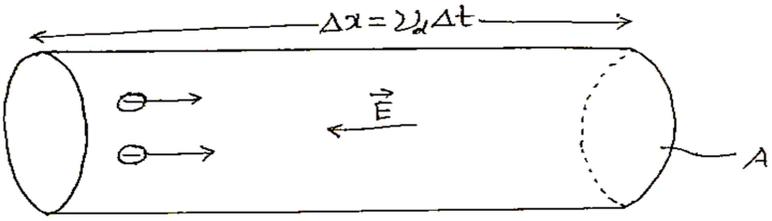	<p>In n-type semiconductors Majority charge carriers - electrons Minority charge carriers – holes</p> <p>(b) Diffusion current – during the formation of p n junction , and due to the concentration gradient across p and n – sides , holes diffuse from p side to n side (p → n) and electrons diffuse from n – side to p – side (n → p). This motion of charge carriers gives rise to diffusion current across the junction.</p> <p>Drift current –Due to electric field at junction, an electron on p – side of the junction moves to n- side and a hole on n – side of the junction moves to p-side. This motion of charge carriers due to electric field gives drift current.</p>	<p>1/2 1/2 1/2</p>	<p>3</p>
<p>28.</p>	<p>(a)</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <p>(i) Deriving the expression for resistivity of a conductor 2 (ii) Comparison of charges Q₁ and Q₂ 1</p> </div>  <p>Total charge transported along E is</p> $I \Delta t = \frac{e^2 A}{m} \tau n \Delta t E$ $\frac{I}{A} = \frac{ne^2}{m} \tau E$ $J = \frac{1}{\rho} E$ $\rho = \frac{m}{ne^2 \tau}$ <p>Alternatively- Current in the conductor- $I = neAv_d$</p>	<p>1/2 1/2 1/2 1/2 1/2</p>	

	$I_{\max} = \frac{E}{r}$ (II) $V = V_+ + V_- - Ir$ $V = E - Ir$ $V_{\max} = E$, when $I=0$ (ii) $I_1 R_1 + I_1 r = I_2 R_2 + I_2 r$ $r = \frac{I_2 R_2 - I_1 R_1}{I_1 - I_2}$	$\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$	 3
SECTION - D			
29.	(i) (C) $\sqrt{\frac{Ke^2}{mr}}$ (ii) (B) $\frac{-Ke^2}{2r}$ (iii) (C) -2.48, 2.48 (iv) (a) (D) $\frac{1}{n^3}$ OR (b) (C) 1.59 \AA	 1 1 1 1 1	 4
30.	(i) (C) $\frac{2\epsilon_0 KL^2}{d}$ (ii) (B) $\frac{\epsilon_0 VKL^2}{d}$ (iii) (A) $\frac{V}{d}$ (iv) (a) (C) $\frac{d}{2K}$ OR (b) (D) Zero	 1 1 1 1	 4

31.

(a)

(i)

- Statement of Lenz's law 1/2
- Explaining, how this law is a consequence of law of conservation of energy 1/2

(ii)

(I) Direction of induced current when loop enters and loop leaves 1/2+1/2

(II) Plots showing variation of magnetic flux (ϕ) with time (t), induced emf (E) with time (t) and relevant values E, (ϕ) and t on the graph 1

Lenz's law – Polarity of the induced emf is such that it tends to produce a current, which opposes the change in magnetic flux that produces it.

1/2

When magnet is moved closer/ away from the loop, same/ opposite pole is developed on the approaching face of the loop. So mechanical work is required to move a magnet which gets converted into electrical energy which is consistent with the law of conservation of energy.

1/2

(ii)


(I)

- Anticlockwise
- Clockwise


1/2

1/2

(II)

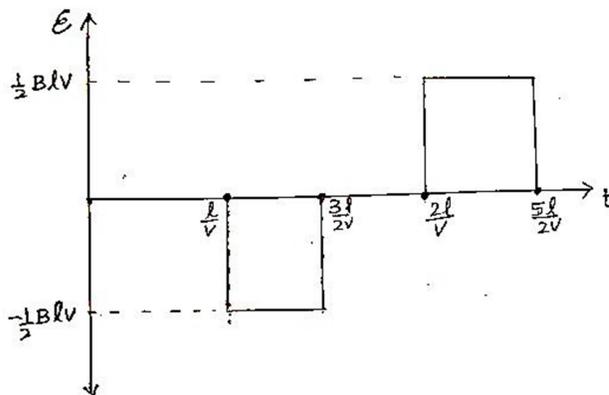

1 1/2

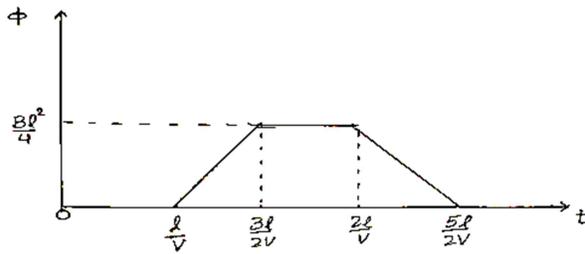

OR

(b)

(i)		
Difference between Peak value and rms value of ac	1	
Relation	$\frac{1}{2}$	
(ii) (I) Identification of elements X and Y by phasor diagram	1	
(II) Obtaining		
• Resonance condition	1	
• Expression for resonant frequency	1	
• Impedance value	$\frac{1}{2}$	

(i)

Peak value - It is the maximum value of Alternating current.

rms value - It is the equivalent dc current that would produce the same average power loss as alternating current.

1

Alternatively-


Peak value - It is the maximum value of Alternating current.

rms value- It is the effective value of an ac representing the equivalent dc, that would produce the same heating effect in same resistor in same time period.

Relation $I_{\text{rms}} = \frac{I_0}{\sqrt{2}}$


$\frac{1}{2}$

(ii) (I) X- Inductor (L)

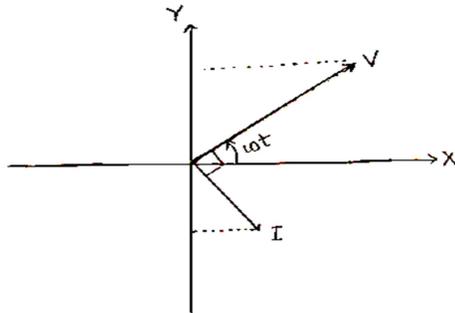

1/2

Y- Capacitor (C)

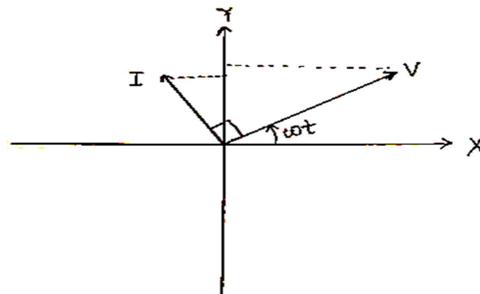

1/2

(II) Impedance of the circuit

$$Z = (X_L - X_C)$$

1/2

At resonance $Z = 0$

$$X_L = X_C$$

1/2


$$\omega L = \frac{1}{\omega C}$$

1/2

$$\omega^2 = \frac{1}{LC}, \quad \omega = \frac{1}{\sqrt{LC}}$$

	$v = \frac{1}{2\pi\sqrt{LC}}$ <p>Impedance at resonance $Z=0$</p>	$\frac{1}{2}$ $\frac{1}{2}$	5								
32.	<p>(a)</p> <table border="1" style="width: 100%;"> <tr> <td>(i) Calculation of focal length of concave lens</td> <td style="text-align: right;">3</td> </tr> <tr> <td>(ii) Calculation of</td> <td></td> </tr> <tr> <td> • Angle of minimum deviation</td> <td style="text-align: right;">1</td> </tr> <tr> <td> • Angle of incidence</td> <td style="text-align: right;">1</td> </tr> </table> <p>For real image form by Convex lens</p> $\frac{1}{f_1} = \frac{1}{v_1} - \frac{1}{u_1}$ $\frac{1}{10} = \frac{1}{v_1} - \frac{1}{(-30)}$ $v_1 = 15 \text{ cm}$ <p>For Combination of lenses, let the focal length of combination of lens is f_3</p> $\frac{1}{f_3} = \frac{1}{v_3} - \frac{1}{u_3}$ $\frac{1}{f_3} = \frac{1}{(15+45)} + \frac{1}{30}$ $f_3 = 20 \text{ cm}$ <p>Let the focal length of concave lens is f_2</p> $\frac{1}{f_3} = \frac{1}{f_1} + \frac{1}{f_2}$ $\frac{1}{f_2} = \frac{1}{20} - \frac{1}{10}$ $f_2 = -20 \text{ cm}$ <p>(ii) Angle of minimum deviation</p> $\mu = \frac{\sin \frac{(A+\delta_m)}{2}}{\sin \frac{A}{2}}$ $\sqrt{3} = \frac{\sin \frac{(60^\circ + \delta_m)}{2}}{\sin 30}$	(i) Calculation of focal length of concave lens	3	(ii) Calculation of		• Angle of minimum deviation	1	• Angle of incidence	1	$\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$	
(i) Calculation of focal length of concave lens	3										
(ii) Calculation of											
• Angle of minimum deviation	1										
• Angle of incidence	1										

$\frac{\sqrt{3}}{2} = \text{Sin} \frac{(A + \delta_m)}{2}$ $60^\circ = \frac{(A + \delta_m)}{2}$ $\delta_m = 60^\circ$ <p>Angle of incidence</p> $i + e = A + \delta$ $2i = A + \delta_m$ $i = \frac{A + \delta_m}{2}$ $i = 60^\circ$	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p>													
OR														
(b)														
<table style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="padding: 2px;">(i)</td> <td></td> <td></td> </tr> <tr> <td style="padding: 2px;">(I) Finding the slit separation</td> <td style="text-align: right; padding: 2px;">1½</td> <td></td> </tr> <tr> <td style="padding: 2px;">(II) Calculation of distance between central maximum and first minimum</td> <td style="text-align: right; padding: 2px;">1½</td> <td></td> </tr> <tr> <td style="padding: 2px;">(ii) Calculation of distance between first order minima on both sides of central maxima</td> <td style="text-align: right; padding: 2px;">2</td> <td></td> </tr> </tbody> </table>			(i)			(I) Finding the slit separation	1½		(II) Calculation of distance between central maximum and first minimum	1½		(ii) Calculation of distance between first order minima on both sides of central maxima	2	
(i)														
(I) Finding the slit separation	1½													
(II) Calculation of distance between central maximum and first minimum	1½													
(ii) Calculation of distance between first order minima on both sides of central maxima	2													
<p>(i)</p> <p>(I) Slit separation</p> $\beta = \frac{D\lambda}{d}$ $d = \frac{D\lambda}{\beta}$ $= \frac{633 \times 10^{-9} \times 5}{5 \times 10^{-3}}$ $= 633 \times 10^{-6} m$ $= 633 \mu m$ <p>(II) Distance of first minimum from central maximum</p> $x_n = \frac{(2n-1)\lambda D}{2d}$	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p>													

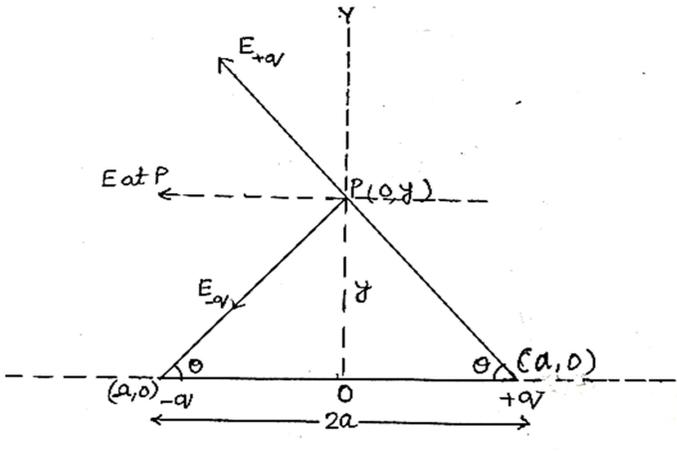	<p>$n = 1$</p> $x = \frac{633 \times 10^{-9} \times 5}{2 \times 5 \times 10^{-3}}$ <p>$x = 316.5 \times 10^{-6} \text{ m}$</p> <p>$x = 316.5 \mu\text{m}$</p> <p>(ii) Distance between first order minima on both the side</p> $W = \frac{2D\lambda}{d}$ $= \frac{2 \times 650 \times 10^{-9}}{0.6 \times 10^{-3}} \times 60 \times 10^{-2}$ $= 1.3 \times 10^{-3} \text{ m}$	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>1</p> <p>$\frac{1}{2}$</p>	<p>5</p>
<p>33.</p>	<p>(a)</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <p>(i) Finding electric field at a far off point ($y \gg a$) 3</p> <p>(ii) Calculation of work done in shifting the charges 2</p> </div>  <p>Magnitude of electric field due to the two charges $+q$ and $-q$ are given by</p> $E_{+q} = \frac{q}{4\pi\epsilon_0} \frac{1}{y^2 + a^2}$	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p>	

$$E_{-q} = \frac{q}{4\pi\epsilon_0} \frac{1}{y^2 + a^2}$$

Components normal to the dipole axis cancel out.

The components along the dipole axis add up.

The total electric field is opposite to the dipole moment will be given by-


$$\vec{E} = - (E_{+q} + E_{-q}) \cos \theta \hat{p}$$

$$= - \frac{2qa}{4\pi\epsilon_0 (y^2 + a^2)^{3/2}} \hat{p} \quad (\hat{p} \text{ is a unit vector along dipole moment})$$

At large distance ($y \gg a$)

$$\vec{E} = \frac{-2qa}{4\pi\epsilon_0 y^3} \hat{p}$$

(ii)

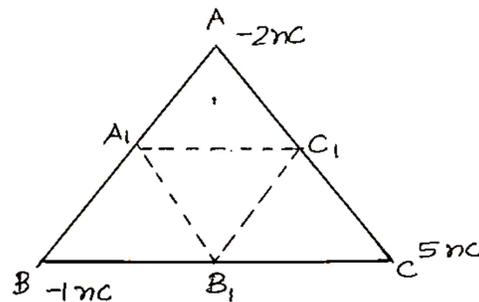

Initial electrostatic potential energy of the system

$$U_1 = \frac{1}{4\pi\epsilon_0} \left(\frac{q_A q_B}{AB} + \frac{q_C q_A}{AC} + \frac{q_C q_B}{BC} \right)$$

$$= \frac{9 \times 10^9}{0.2} [(-2 \times -1) + (-2 \times 5) + (-1 \times 5)] \times 10^{-18}$$

$$U_1 = -5.85 \times 10^{-7} \text{ J}$$

1/2


1/2

1/2

1/2

1/2

1/2

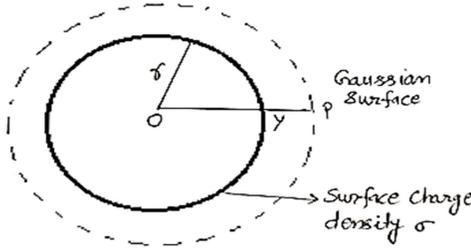$U_2 = \frac{1}{4\pi\epsilon_0} \left(\frac{q_{A_1}q_{B_1}}{A_1B_1} + \frac{q_{C_1}q_{A_1}}{A_1C_1} + \frac{q_{C_1}q_{B_1}}{B_1C_1} \right)$ $U_2 = -11.7 \times 10^{-7} \text{ J}$ $W = U_2 - U_1 = -5.85 \times 10^{-7} \text{ J}$	$\frac{1}{2}$ $\frac{1}{2}$	
OR		
(b)		
<p>(i)</p> <ul style="list-style-type: none"> • Showing consistency of Gauss's theorem with Coulomb's law 1 • Derivation for electric field due to uniformly charged thin spherical shell at (I) $y > r$ (II) $y < r$ 2 <p>(ii) Finding the type and magnitude of charge. 2</p>		
(i)		
<ul style="list-style-type: none"> • Gauss's theorem is based on the inverse square dependence on distance contained in the coulomb's law. <p>Alternatively- According to Gauss's theorem</p>	1	
$\oint \vec{E} \cdot d\vec{s} = \frac{q}{\epsilon_0}$ $E = \frac{1}{4\pi\epsilon_0} \frac{q}{r^2}$	$\frac{1}{2}$	
<p>According to Coulomb's law, force on charge q_0 in this field</p> $F = \frac{1}{4\pi\epsilon_0} \frac{qq_0}{r^2}$	$\frac{1}{2}$	
Therefore, Gauss's law is consistent with Coulomb's law		
<ul style="list-style-type: none"> • (I) For $y > r$ 		
<p>(i)</p> 		
<p>Electric flux through Gaussian surface $E \times 4\pi y^2$ The charge enclosed by the surface $\sigma \times 4\pi r^2$</p>		


Using Gauss theorem

$$E(4\pi y^2) = \frac{\sigma 4\pi r^2}{\epsilon_0}$$

$$\vec{E} = \frac{q}{4\pi\epsilon_0 y^2} \hat{r}$$

(II) For $y < r$

(iv)

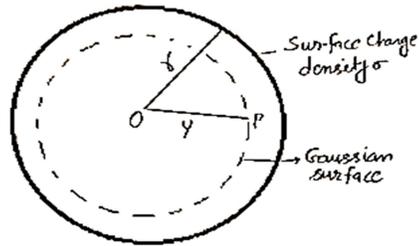


The charge enclosed by Gaussian surface = 0

Using Gauss theorem

$$\text{Electric flux} = E(4\pi y^2) = 0$$

i.e. $E = 0$ ($y < r$)

(ii)

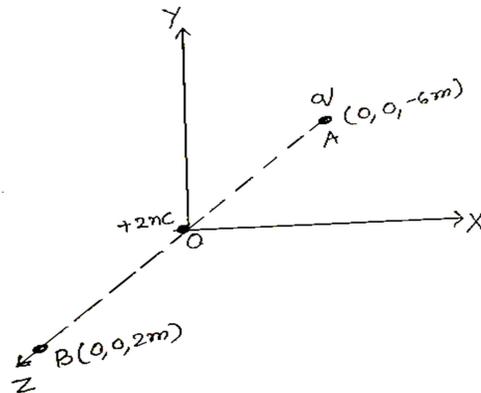

1/2

1/2

1/2

1/2

	<p>Let the charge is kept at A be q Potential at point B due to charge at the origin O and charge (q) at A</p> $V = V_1 + V_2$ $V = \frac{1}{4\pi\epsilon_0} \left[\frac{2 \times 10^{-9}}{2} + \frac{q}{6+2} \right]$ $\frac{1}{4\pi\epsilon_0} \left[10^{-9} + \frac{q}{8} \right] = 0$ $q = -8 \times 10^{-9} \text{C}$	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p>	<p>5</p>
--	---	---	-----------------